


(PATTB0017)

BIADHESIVE PET 50 HP-2/V-5 PET30 KW55

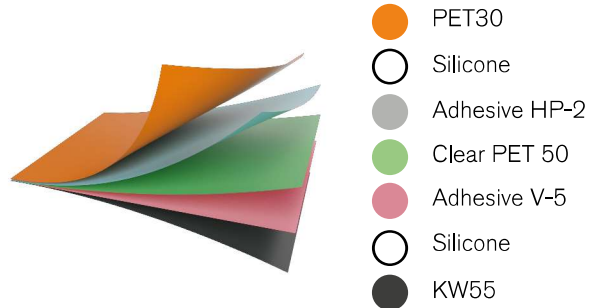

Facestock

Reference: Clear PET 50

Description:
Clear PET film

Thickness (μ): 50

Grammage (gr/m²): 70

Adhesive

Reference: HP-2

Characteristics:

Permanent adhesive hot melt. Good adhesion to several substrates, specially non-polar ones. Designed with good initial adhesion. Excellent behaviour in machinery and label conversion.

Tack (N) stainless steel FTM-9: > 10

Cohesion (h) 1Kg FTM-8: > 8

Labelling temperature (°C): > 5

Usage temperature (°C): - 5 + 70

Adhesive

Reference: V-5

Characteristics:

Permanent adhesive acrylic water-based. Designed for applications with very high resistance to temperature. Very good performance in converting. Medium initial tack and peel adhesion.

Tack (N) stainless steel FTM-9: > 3

Cohesion (h) 1Kg FTM-8: > 5

Labelling temperature (°C): > 5

Usage temperature (°C): - 10 + 70

Liner

Reference: PET30

Description:

Clear polyester film, one sided silicone coated

Thickness (μ): 30

Grammage (gr/m²): 42

Liner

Reference: KW55

Description:

Bleached kraft paper, coated on one side and treated on the backside

Thickness (μ): 58

Grammage (gr/m²): 55

Additional information

The stated technical specification and information are of a general nature and are based on the experience and on the current knowledge of VISATAC wherefore the suitability of the product for the intended application and the end use cannot be guaranteed. The purchaser of the product is solely responsible to test and to approve the product as well as its printability under end use conditions, to determine the suitability for its purposes and to ensure the product meets the particular requirements. VISATAC cannot be held liable for unsuitable end use of their products. This product specification replaces all previous versions. All data is subject to change without prior notice.

Shelf life

1 year under generally recommended storage at a temperature between 20 °C and 25 °C and a relative humidity of 40-50 %